


12V SINGLE COLOUR LED NEON FLEX



www.neonflex.co.za
www.lumul.co.za

enquiries@lumul.co.za
(083) 349-8453

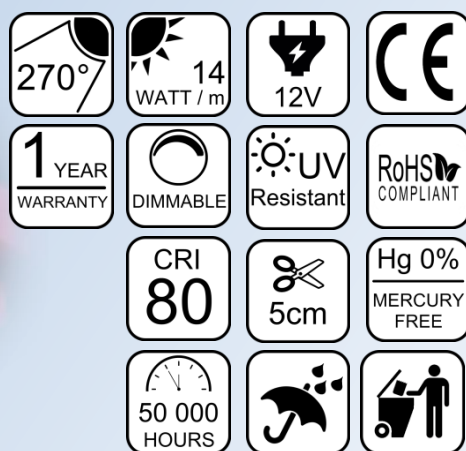

Input power	12V DC (Constant voltage)	CRI (White)	> 80Ra										
Wattage	Rated 14W per meter Tested 6W per meter @ 12V	Chipset	Epistar 2835 120 LED per meter										
Cutting unit	Cuttable every 5cm	Jacket size	9mm x 19mm										
Dimming	Dimmable with appropriate controllers / drivers	Jacket material	Soft PVC with UV inhibitors										
LED lifespan	70% of original brightness at 50,000 hours	Jacket colour	Coloured										
Maximum length	8m powered from one end 15m powered from both ends	Jacket shape	Dome										
Protection	IP67	Warranty	1 year										
Beam angle	270°	Bend radius	4cm										
Colours	<table border="1"> <tr> <td>COOL WHITE</td> <td>WARM WHITE</td> <td>NATURAL WHITE</td> <td>RED</td> <td>GREEN</td> <td>BLUE</td> <td>YELLOW</td> <td>ORANGE</td> <td>PURPLE</td> <td>PINK</td> </tr> </table>	COOL WHITE	WARM WHITE	NATURAL WHITE	RED	GREEN	BLUE	YELLOW	ORANGE	PURPLE	PINK		
COOL WHITE	WARM WHITE	NATURAL WHITE	RED	GREEN	BLUE	YELLOW	ORANGE	PURPLE	PINK				
Accessories	End caps, connectors (L, I, cable), power cable, connector pins, splicing pins, heat shrink, aluminium mounting channels, dimming controllers												
Applications	Signage (Glass neon replacement), building exterior lighting, accent lighting, border lighting, décor lighting												
Usage	Maximum 12 hours per day												