


# 220V SINGLE COLOUR LED NEON FLEX



www.neonflex.co.za  
www.lumul.co.za

enquiries@lumul.co.za  
(083) 349-8453

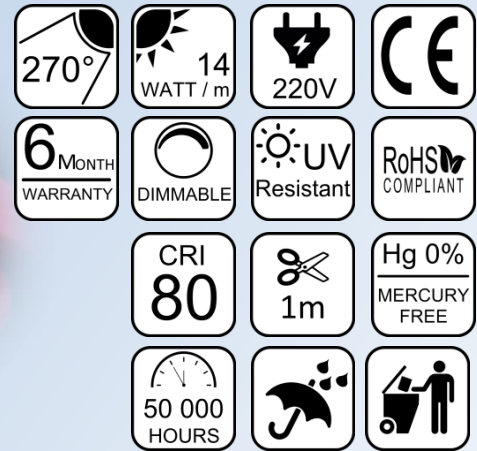

<b>Input power</b>	~225V AC (Power converter)	<b>CRI (White)</b>	> 80Ra										
<b>Wattage</b>	Rated 14W per meter Tested 6W per meter @ 220V	<b>Chipset</b>	Epistar 2835 120 LED per meter										
<b>Cutting unit</b>	Cuttable every 1m	<b>Jacket size</b>	14mm x 26mm										
<b>Dimming</b>	Dimmable with appropriate controllers / drivers	<b>Jacket material</b>	Soft PVC with UV inhibitors										
<b>LED lifespan</b>	70% of original brightness at 50,000 hours	<b>Jacket colour</b>	Milky White										
<b>Maximum length</b>	50m powered from one end	<b>Jacket shape</b>	Dome										
<b>Protection</b>	IP67	<b>Warranty</b>	6 months if installed with online UPS										
<b>Beam angle</b>	270°	<b>Bend radius</b>	5cm										
<b>Colours</b>	<table border="1"> <tr> <td>COOL WHITE</td> <td>WARM WHITE</td> <td>NATURAL WHITE</td> <td>RED</td> <td>GREEN</td> <td>BLUE</td> <td>YELLOW</td> <td>ORANGE</td> <td>PURPLE</td> <td>PINK</td> </tr> </table>	COOL WHITE	WARM WHITE	NATURAL WHITE	RED	GREEN	BLUE	YELLOW	ORANGE	PURPLE	PINK		
COOL WHITE	WARM WHITE	NATURAL WHITE	RED	GREEN	BLUE	YELLOW	ORANGE	PURPLE	PINK				
<b>Accessories</b>	End caps, connectors (T, L, I, cable), power cable, connector pins, splicing pins, heat shrink, aluminium mounting channels, dimming controllers												
<b>Applications</b>	Signage (Glass neon replacement), building exterior lighting, accent lighting, border lighting, décor lighting												
<b>Usage</b>	Maximum 12 hours per day												